


## VODTOVSLED - "BOSS" RUSTFRIT SYREFAST STÅL


SPLIT LINK - "BOSS" STAINLESS ACID PROOF STEEL



Best. nr.	A	B	C	Ø	Swl	Brud	Vægt
Order no.	A	B	C	Thickness	Swl	Break load	Weight
	mm	mm	mm	mm	Tons 1:5	Tons	Kg.
DL19S	80	51	24	19	0,4	2,0	0,290
DL21S	113	65	23	24	1,4	7,0	0,635
DL22S	110	74	33	23	1,3	6,5	0,610

## VODTOVSLED - "BOSS" RUSTFRIT SYREFAST STÅL


SPLIT LINK - "BOSS" STAINLESS ACID PROOF STEEL

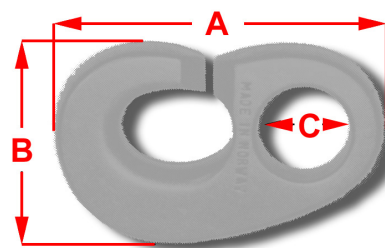

Best. nr.	A	B	C	Ø	Swl	Brud	Vægt
Order no.	A	B	C	Tykkelse/Thickness	Swl	Break load	Weight
	mm	mm	mm	mm	Tons 1:5	Tons	Kg.
DL26S	150	95	39	28	2,4	12,0	1,70

## VODTOVSLED - RUSTFRIT STÅL

SPLIT LINK - STAINLESS STEEL

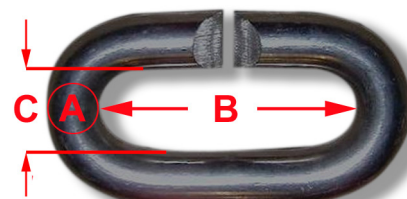

Best. nr.	A	A	B	C	Swl	Brud	Vægt
Order no.	A	A	B	C	Swl	Break load	Weight
	Tom/inch	mm	mm	mm	Tons 1:5	Tons	Kg./100
21006SS	1/4	6	22	8	0,11	0,59	1,5
21008SS	5/16	8	30	10	0,16	0,8	3,0
21012SS	1/2	10	65	18	0,3	1,5	16,5
21016SS	5/8	16	72	18	0,4	2,0	33,0
DS10SSL	3/8	10	50	16	0,2	1,0	8,5
DS12SS	1/2	12	55	18	0,3	1,5	16,5
DS16SS	5/8	16	72	21	0,4	2,0	33,0
DS19SS	3/4	19	80	24	0,5	2,5	50,0
DS22SS	7/8	22	88	27	0,6	3,0	75,0