


VODTOVSLED - CHROM STÅL - GULLIG GALVANISERET


SPLIT LINK - CHROME STEEL - YELLOWING GALVANISED

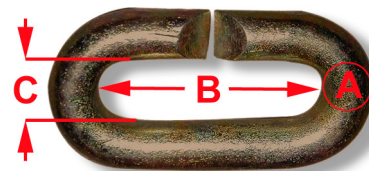

Best. nr.	A	A	B	C	Swl	Brud	Vægt
Order no.	A	A	B	C	Swl	Break load	Weight
	Tom/inch	mm	mm	mm	Tons 1:5	Tons	Kg./100
21010	3/8	10	52	16			8,5
21012	1/2	12	55	18			16,5
21014 (DS14CH)	9/16	14	59	17	0,5	2,5	20,0
21016 (DS16CH)	5/8	16	72	22	0,7	3,5	33,0
21019 (DS19CH)	3/4	19	81	23	1,4	7,0	55,0
21022 (DS22CH)	7/8	22	87	25	1,8	9,0	75,0
21025 (DS25CH)	1	25	97	35	2,2	11,0	110,0

VODTOVSLED - GALVANISERET



SPLIT LINK - GALVANISED

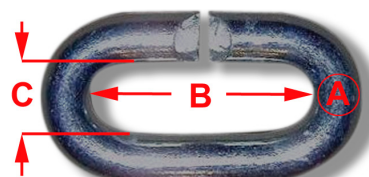

Best. nr.	A	A	B	C	Swl	Brud	Vægt
Order no.	A	A	B	C	Swl	Break load	Weight
	Tom/inch	mm	mm	mm	Tons 1:5	Tons	Kg./100
DS10GAL	3/8	10	50	16	0,1	0,5	8,5
DS12GA	1/2	12	55	18	0,2	1,0	16,5
DS16GA	5/8	16	72	21	0,3	1,5	33,0
DS19GA	3/4	19	80	24	0,5	2,5	50,0
DS22GA	7/8	22	88	27	0,6	3,0	75,0

P- LED - GALV. OVAL - KORT MODEL

QUICK LINK - GALV. OVAL - SHORT MODEL

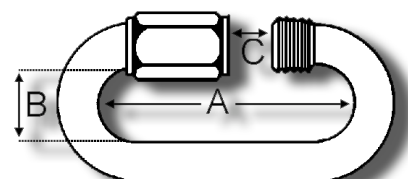

Best. nr.	Størrelse	A	B	C	Swl	Brud	Vægt/100	Antal/pk.
Order no.	Size	A	B	C	Swl	Break load	Weight/100	Qty/box
	mm	mm	mm	mm	1:5 Tons	Tons	Kg	Stk./PCs.
3,5N	3,5	29	10	5,0	0,10	0,50	1,2	450
4,0N	4,0	33	11	5,5	0,18	0,90	2,1	300
5,0N	5,0	38	10	6,5	0,34	1,70	2,2	150
6,0N	6,0	45	14	7,5	0,50	2,50	3,6	100
8,0N	8,0	60	18	10	1,00	5,00	7,8	75