


BMM – TRIO BLOKKE, GALVANISEREREDE M/NYLON SKIVE

BMM – TRIO BLOCKS, GALVANISED WITH NYLON SHEAVE

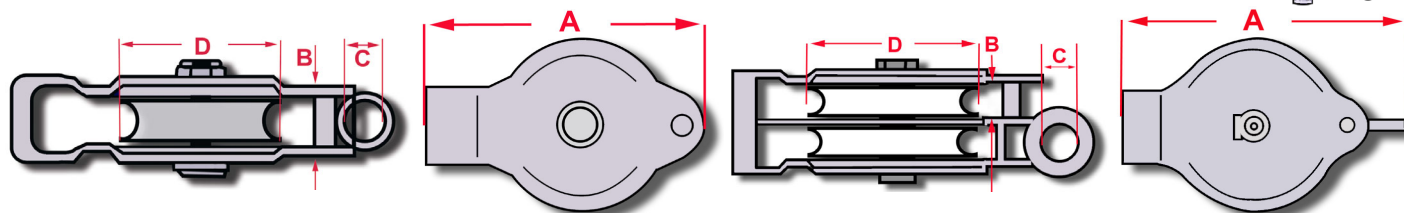

Best. nr.	A	B	C	D	Max wire	SWL	Brudstyrke	Vægt/stk.
Order no.	A	B	C	D	Max wire	SWL	Breaking load	Weight/Pcs
	mm	mm	mm	mm	mm	Tons 1:5	Tons	Kg.
KT 1 – N☒	163	22	16	80	16	1,0	5,0	1,3
KT 2 – N☒	195	24	22	110	18	2,0	10,0	2,1
KT 3 – N☒	257	28	31	150	20	3,0	15,0	4,1
KT 1D – N☒	187	22	16	80	16	1,0	5,0	1,9
KT 2D – N☒	224	24	22	110	18	2,0	10,0	3,3
KT 3D – N☒	296	28	31	150	20	3,0	15,0	6,6

Blokkene skal bestilles med: / Blocks must be ordered with:



E Swivel øje / Swivel eye

K Swivel krog / Swivel hook

Ekstra tillæg / Extra add on services




B Hundsvot / becket

C Testede med certifikat / Tested included certificate



Article	M	N	O	P	O	P	Q
	mm	mm	mm	mm	mm	mm	mm
KT 1 – N	25	34	13	65	20	82	25
KT 2 – N	23	57	16	94	25	94	28
KT 3 – N	26	66	20	110	30	105	30

Skiver / Sheaves

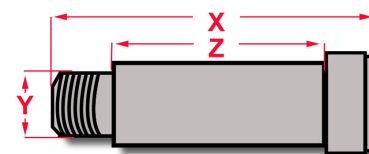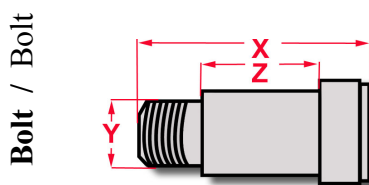

Order no.	D	B	S	Weight kg.	Order no.	X	Y	Z	Weight kg.	Order no.	X	Y	Z	Weight kg.
	mm	mm	mm	kg		mm	mm	mm	kg		mm	mm	mm	kg
SKT 1N	80	22	20	0,15	PKT 1N	50	17	28	0,10	PKT1D N	77	17	55	0,15
SKT 2N	110	24	25	0,25	PKT 2N	52	20	30	0,15	PKT2D N	82	20	60	0,25
SKT 3N	150	28	25	0,55	PKT 3N	67	20	41	0,20	PKT3D N	100	20	76	0,30