



BMM – LEDEBLOKKE, BLÅMALEDE
BMM – FAIRLEAD BLOCKS, BLUE PAINTED

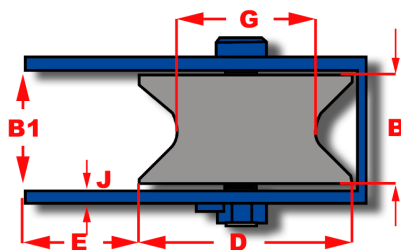

Best. nr. Order no.	A	B	B ₁	D	E	G	J	SWL SWL	Brudstyrke Breaking load	Vægt/stk. Weight/Pcs
	mm	mm	mm	mm	mm	mm	mm	Ton 1:5	Ton	Kg.
KL 130 – ☒	235	100	100	130	100	85	10			10,9
KL 170 – ☒	300	100	100	170	130	125	10			20,4
KL 215 – ☒	340	100	100	215	117	164	10			27,0
KL 230 – ☒	390	120	120	230	135	175	12			43,5
KL 300 – ☒	475	120	120	300	155	240	12			53,8
KL 370 – 1 *	615	140	140	370	220	285	12			86,7
KL 400 – 2 **	660	180	180	400	230	280	15			118,0
KL 500 – 2 **	770	180	180	500	255	380	20			213,0
KL 600 – 2 **	895	180	185	600	280	480	20			309,0
KL 650 – 2 **	960	240	220	650	305	470	20			415,0

*K370 – 1 Kun med kugleleje / Only with ball bearing


** K400 - 2/K650 – 2 Kun med rulleleje / Only with roller bearing

Blokkene skal bestilles med: / Blocks must be ordered with:

- Kuglelejer / Ball bearings Smørbare / Greaseable** **Bronzelejer / Bronze bushings Smørbare / Greaseable**

Ekstra tillæg / Extra add on services

- Hærdet Skive / Flame hardened sheave**

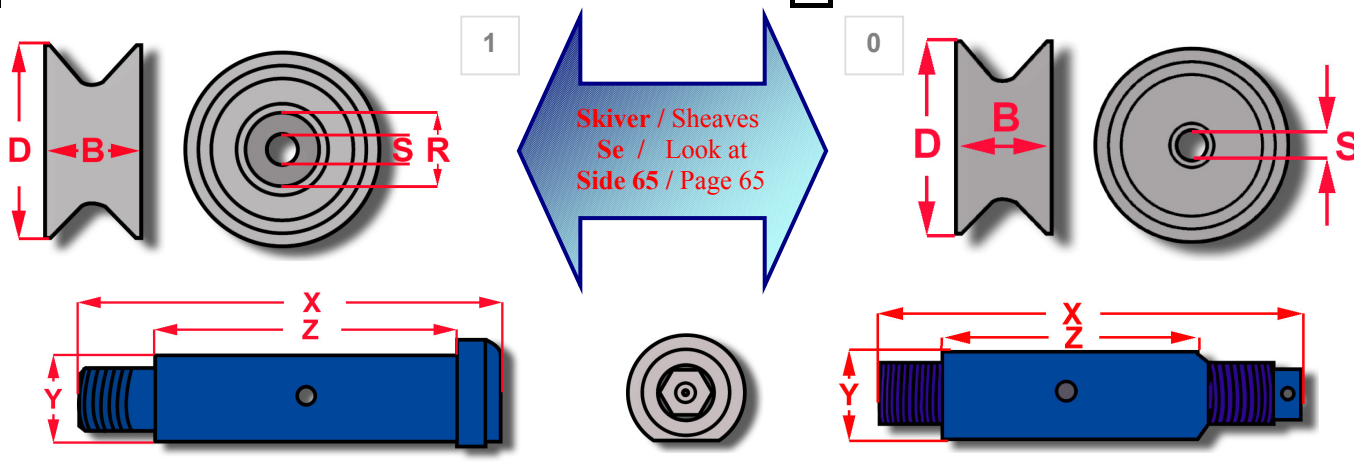

Order no.	X	Y	Z	Weight	Order no.	X	Y	Z	Weight	Order no.	X	Y	Z	Weight
	mm	mm	mm	Kg.		mm	mm	mm	Kg.		mm	mm	mm	Kg.
PK 130 – 1	155	25	123	0,70	PK 130 – 0	155	25	123	0,70	PK 400 – 2	215	60	100	8,00
PK 170 – 1	155	25	123	0,70	PK 170 – 0	155	25	123	0,70	PK 500 – 2	315	60	206	12,70
PK 215 – 1	158	35	117	1,30	PK 215 – 0	158	35	117	1,30	PK 600 – 2	328	70	212	12,70
PK 230 – 1	190	35	133	1,50	PK 230 – 0	190	38	133	1,60	PK 650 – 2	328	70	212	14,80
PK 300 – 1	190	35	133	1,50	PK 300 – 0	190	38	133	1,60					
PK 370 – 1	234	45	152	3,20										