


## Kæde klasse 2 - langeddedet, blank.


Chain grade 20 - long link, bright polished.



Best. nr.	Størrelse		A	B	C	Swl	Brud	Vægt	Bundt
Order no.	Size		A	B	C	Swl	Break load	Weight	Bundle
	mm	Inch.	mm	mm	mm	tons 1:4	tons	kg/m	m
104959	3,0	1/8	3	27	8	0,070	0,280	0,15	20
104962	4,0	5/32	4	30	10	0,125	0,500	0,28	20
104964	5,0	3/16	5	32	12	0,190	0,775	0,45	20
104966	6,0	1/4	6	37	14	0,280	1,150	0,65	20
104968	7,0	9/32	7	43	16	0,375	1,500	0,90	20
104969	8,0	5/16	8	42	18	0,500	2,000	1,20	30
151-10	10,0	3/8	10	62,5	16,5	0,945	3,780	1,70	50

## Kæde klasse 2 - langeddedet, galv.


Chain grade 20 - long link, hot dip galvanised

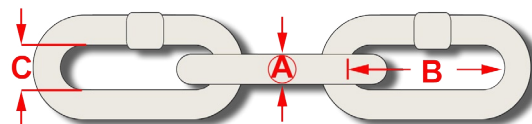

Best. nr.	Størrelse		A	B	C	Swl	Brud	Vægt	Bundt
Order no.	Size		A	B	C	Swl	Break load	Weight	Bundle
	mm	Inch.	mm	mm	mm	tons 1:4	tons	kg/m	m
104973	3,0	1/8	3	27	8	0,070	0,280	0,15	20
104976	4,0	5/32	4	30	10	0,125	0,500	0,28	20
104978	5,0	3/16	5	32	12	0,190	0,775	0,45	20
104980	6,0	1/4	6	37	14	0,280	1,150	0,65	20
104981	7,0	9/32	7	43	16	0,375	1,500	0,90	20
104983	8,0	5/16	8	43	17	0,500	2,000	1,20	20
152100	10,0	3/8	10	62,5	16,5	0,945	3,780	1,70	50
152130	13,0	1/2"	13	85,0	25,0	1,000	4,000	2,36	30

## Rustfri syrefast stål kæde, kortleddet - kval. 316.

Stainless steel chain, short link - type 316.

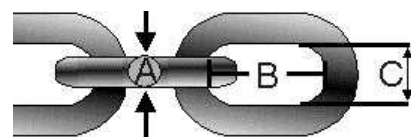

Best. nr.	Størrelse	A	B	C	Swl	Brud	Vægt	Bdt.
Order no.	Size	A	B	C	Swl	Break load	Weight	bundle
	mm	mm	mm	mm	tons 1:4	tons	kg/m	m
316L-2,0K	2	2	13,5	5	0,05	0,2	0,07	100
316L-3,0K	3	3	16	5	0,10	0,4	0,15	100