
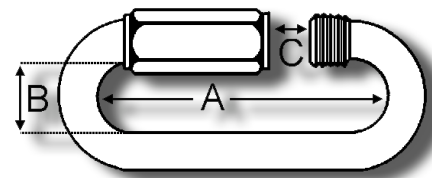


### P- LED - GALV. OVAL - LANG MODEL


QUICK LINK - GALV. OVAL - ENLARGED MODEL

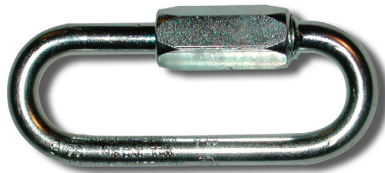

Best. nr.	Størrelse	A	B	C	Swl	Brud	Vægt/100	Antal/pk.
Order no.	Size	A	B	C	Swl	Break load	Weight/100	Qty/box
	mm	mm	mm	mm	1:5 Tons	Tons	Kg	Stk./PCs.
6,0L	6	59	14	16	0,35	1,75	4,2	75
8,0L	8	72	17	18	0,65	3,25	9,2	35
10,0L	10	85	20	20	1,00	5,00	16,6	20
12,0L	12	100	23	23	1,25	6,25	27,2	10
14,0L	14	115	27	27	1,40	7,00	42,0	8
16,0L	16	130	32	28	2,00	10,00	62,5	5

### P- LED - RUSTFRI OVAL - LANG MODEL



QUICK LINK - STAINLESS OVAL - ENLARGED MODEL

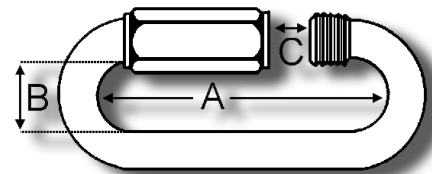

Best. nr.	Størrelse	A	B	C	Swl	Brud	Vægt/100	Antal/pk.
Order no.	Size	A	B	C	Swl	Break load	Weight/100	Qty/box
	mm	mm	mm	mm	1:5 Tons	Tons	Kg	Stk./PCs.
6,0SSL	6	60	16	15	0,40	2,0	4,2	75
8,0SSL	8	76	19	16	0,80	4,0	9,2	35
10,0SSL	10	90	23	21	1,20	6,0	16,6	20
12,0SSL	12	100	26	23	1,60	8,0	27,2	10
14,0SSL	14	115	30	26	2,48	12,4	42,0	8
16,0SSL	16	129	31	29	3,20	16,0	62,5	5

### P- LED - GALV. OVAL - KORT MODEL "MAILLON-RAPIDE"

QUICK LINK - GALV. OVAL - SHORT MODEL "MAILLON-RAPIDE"

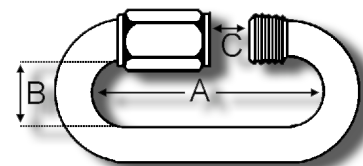

Best. nr.	Størrelse	A	B	C	Swl	Brud	Vægt/100	Antal/pk.
Order no.	Size	A	B	C	Swl	Break load	Weight/100	Qty/box
	mm	mm	mm	mm	1:5 Tons	Tons	Kg	Stk./PCs.
33046003	3,5	31	11	5,5	0,1	0,5	1,2	100
33046005	5,0	39	13	6,5	0,3	1,5	2,1	100
33046006	6,0	45	14	7,5	0,4	2,0	3,5	100
33046008	8,0	58	17	10	0,7	3,5	7,7	100